

- All metal multidirectional anti-vibration/shock mounts
- Exceptional reliability and long life
- High damping
- No aging
- Corrosion resistant
- Unequalled temperature range : - 180°C to 300°C (-290°F to 570°F)
- Great adaptability/versatility

Specials on request

(material size and number of loops, etc.)

Dimensions are in millimeters. For reference only

| SERIES |
|---|
| Materials and finishes (meets RoHS requirements) |
| HH15 |
| Cable: stainless steel galvanized available: HHG |
| Retainer bars: aluminium alloy/SurTec |
| Screws: alloy steel/zinc plate |
| Inserts: stainless steel |
| All stainless steel: HHSS |
| Other materials on request |

| MODEL | | | |
|-------|------------------|-----------------|----------------|
| | height h (mm) | width w (mm) | weight (kg) |
| -12 | 87 | 102 | 1,4 |
| -15 | 94 | 112 | 1,5 |
| -17 | 98 | 120 | 1,6 |
| -20 | 107 | 135 | 1,7 |
| -30 | 117 | 152 | 1,9 |
| -40 | 125 | 165 | 2,1 |
| -50 | 135 | 178 | 2,3 |
| -60 | 146 | 185 | 2,3 |

| INTERFACES | | | |
|---|----------------------------|--|------------------|
| fixtures holes D | Bar 1 | | |
| | 2 through holes ø10,8mm | 2 through holes ø10,8mm countersunk k 90° | 2 inserts M10 |
| Bar 2 | | | |
| 2 through holes ø10,8mm | TM2 | not standard | not standard |
| 2 through holes ø10,8mm countersunk 90° | TCM | CM2 | not standard |
| 2 inserts M10 | TIM | CIM | IM2 |

H H 1 5 - 1 2 C I M

SERIE: HH15

'Half-Helical' mount from the HH15 series




MODEL: -12

height: 87mm
width: 102mm
weight: 1,4kg
loops: serie
standard is 04 loops

INTERFACE: CIM

2 through holes ø10,8mm
countersunk 90° in bar 1,
2 inserts M10 in bar 2



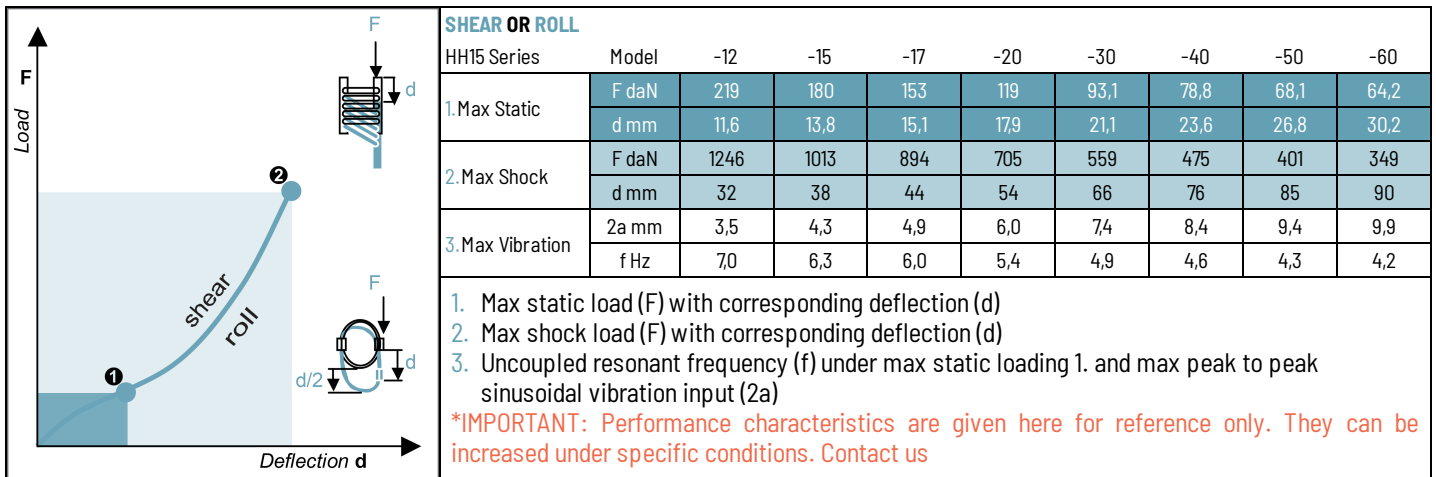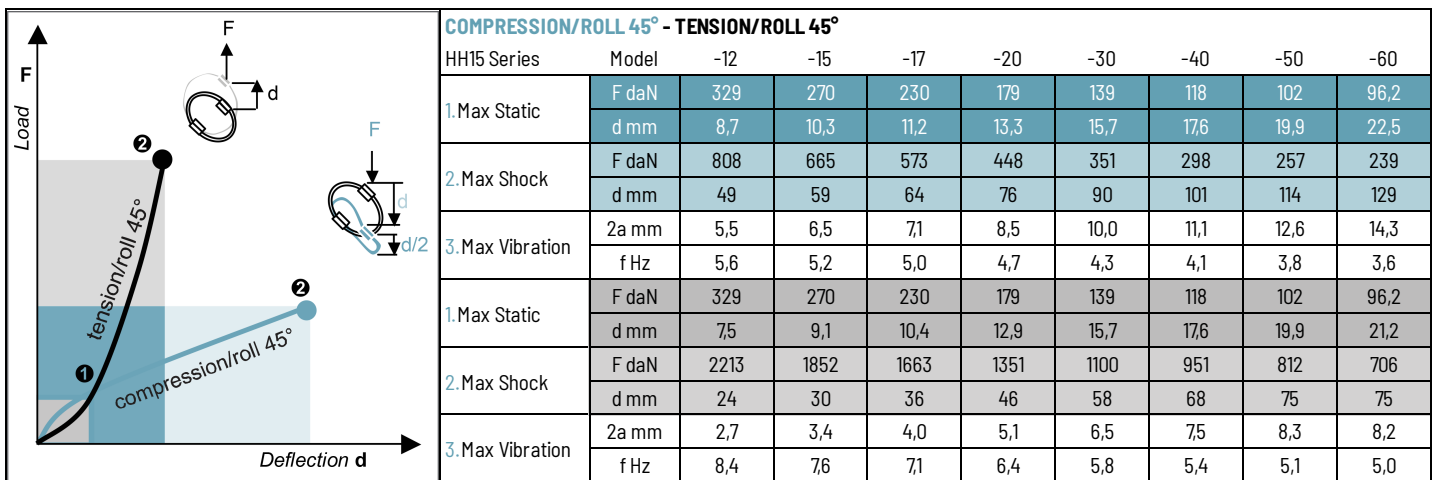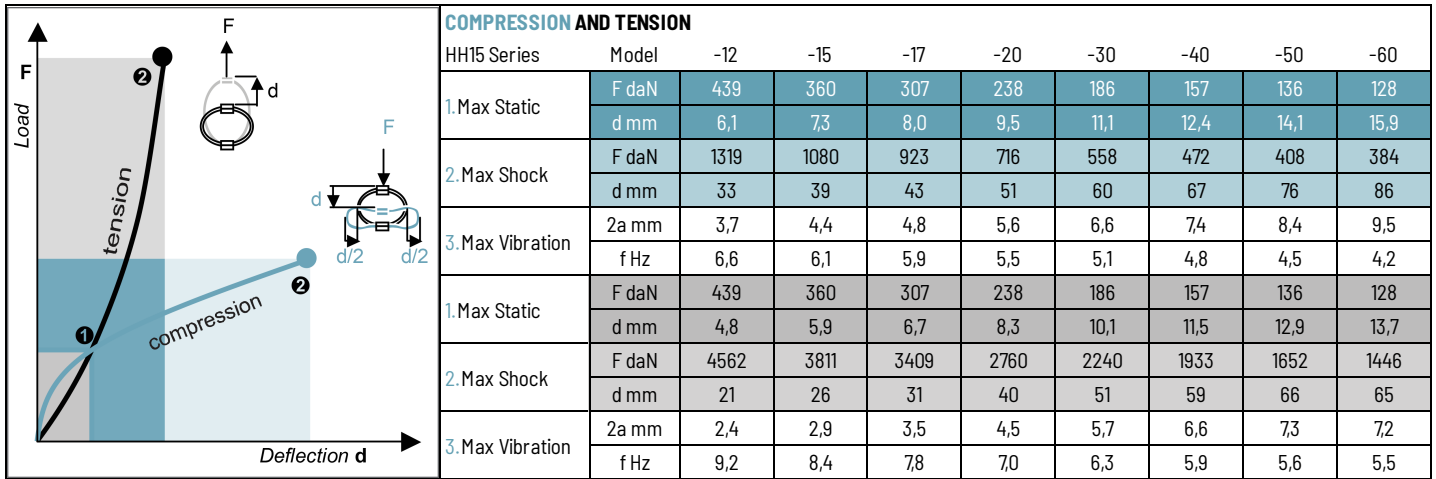

TYPICAL SHOCK/VIBRATION SPECIFICATIONS:

- Air AIR 7306, MIL-E-5400, MIL-C-172, MIL-STD-810
- Ground Forces GAM EG13A, SEFT 001, MIL-STD-810, VG 9533
- Marine GAM EG13C, IT25-21/96-31/15-86, MIL-S-167, MIL-S-901, STANAG 042, BV 043.73, BV 044
- Others GAM EMB1, GAM EMBT4, DEF STAN 07-55, IEC 571, FINABEL 2C