


WIRE ROPE ISOLATORS: 'HELICAL'

DEFINITION
series CB1500

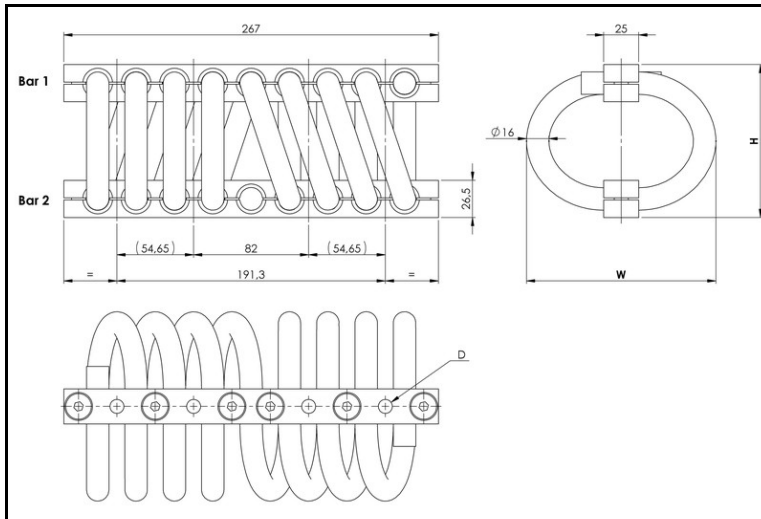

- All metal multidirectional anti-vibration/shock mounts
- Exceptional reliability and long life
- High damping
- No aging
- Corrosion resistant
- Unequalled temperature range : -180°C to +300°C / -290F to 570 F
- Great adaptability/versatility

Specials on request

(material size and number of loops, etc.)

Dimensions are in milimeters. For reference only

SERIES
Materials and finishes (meets RoHS requirements)
CB1500
Cable: stainless steel galvanized available: CBG
Retainer bars: aluminium alloy/ SurTec
Screws: alloy steel/ zinc plate
Inserts: stainless steel
All stainless steel: CBSS
Other materials on request

MODEL	height H (mm)	width W (mm)	weight (kg)
-12	89	102	2,7
-15	96	112	2,9
-17	100	120	3,1
-20	109	135	3,4
-30	119	152	3,8
-40	127	165	4,1
-50	135	178	4,3
-60	146	185	4,6

INTERFACES	Bar 1		
fixtures holes D	4 through holes ø10,8mm	4 through holes ø10,8mm counter-sunk 90°	4 inserts M10
Bar 2	4 through holes ø10,8mm	no suffix	not standard
4 through holes ø10,8mm counter-sunk 90°	CM	CM2	not standard
4 inserts M10	IM	CIM	IM2

C	B	1	5	0	0	-	1	2	C	I	M
---	---	---	---	---	---	---	---	---	---	---	---

SERIE: CB1500

'Helical' mount from the CB1500 series

MODEL: -12

height: 89mm

width: 102mm

weight: 2,7kg

loops: serie


standard is 08 loops




INTERFACE: CIM

4 through holes ø10,8mm

counter-sunk 90° in bar 1,

4 inserts M10 in bar 2

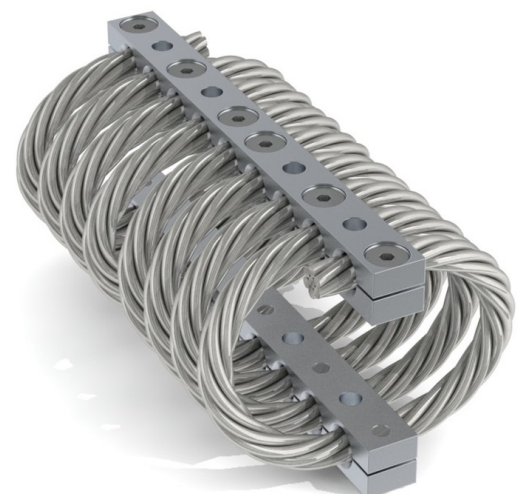

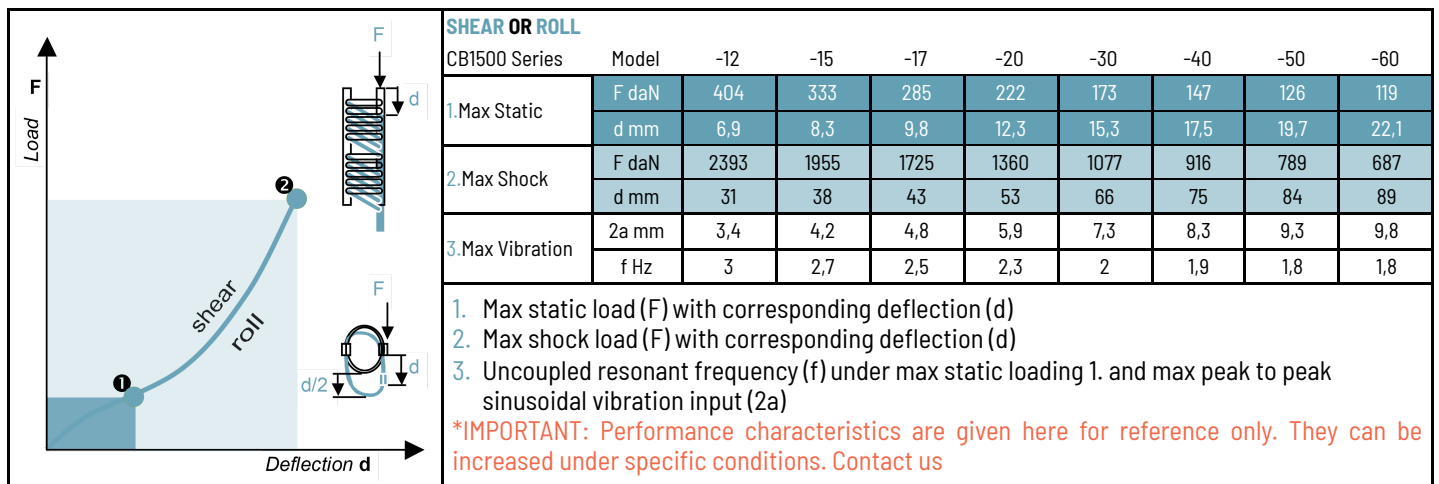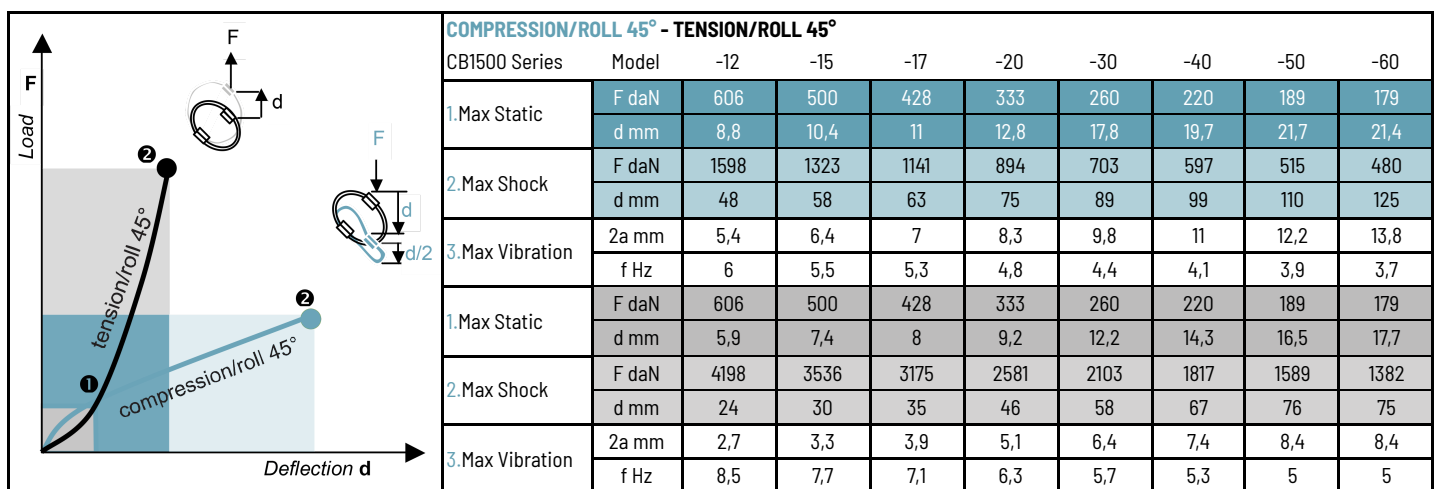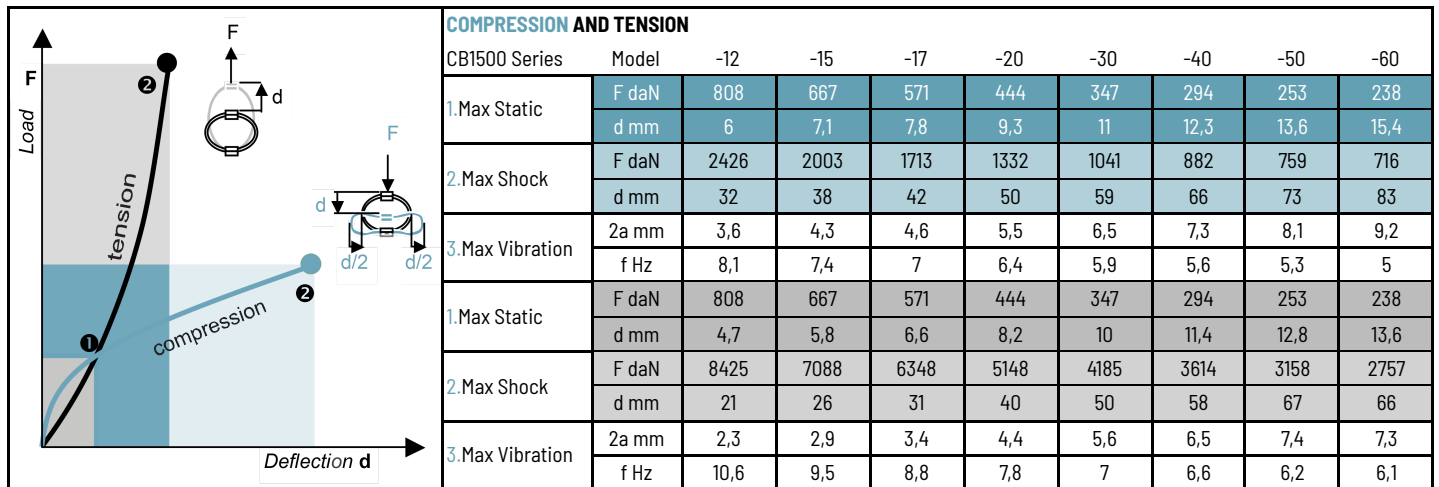

TYPICAL SHOCK/VIBRATION SPECIFICATIONS:

Air	AIR 7306, MIL-E-5400, MIL-C-172, MIL-STD-810
Ground Forces	GAM EG13A, SEFT 001, MIL-STD-810, VG 9533
Marine	GAM EG13C, IT25-21/96-31/15-86, MIL-S-167, MIL-S-901, STANAG 042, BV 043.73, BV 044
Others	GAM EMB1, GAM EMBT4, DEF STAN 07-55, IEC 571, FINABEL 2C

