


WIRE ROPE ISOLATORS: 'HELICAL'

DEFINITION
series CB1800

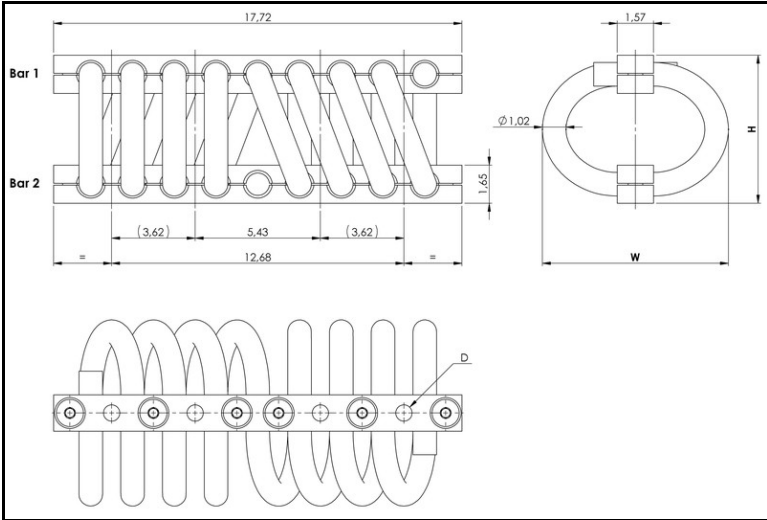

- All metal multidirectional anti-vibration/shock mounts
- Exceptional reliability and long life
- High damping
- No aging
- Corrosion resistant
- Unequalled temperature range : -180°C to +300°C / -290F to 570 F
- Great adaptability/versatility

Specials on request
(material size and number of loops, etc.)

Dimensions are in inches. For reference only

SERIES
Materials and finishes (meets RoHS requirements)
CB1800
Cable: stainless steel galvanized available: CBG
Retainer bars: aluminium alloy/ SurTec
Screws: alloy steel/ zinc plate
Inserts: stainless steel
All stainless steel: CBSS
Other materials on request

MODEL	height H (in)	width W (in)	weight (lbs)
-12	5,2	6,8	26
-15	5,8	7,4	28
-17	6,4	8,1	31
-20	7,2	8,9	34
-30	8,0	9,8	37
-40	9,0	10,9	41
-50	10,1	12,1	46

INTERFACES	Bar 1		
fixtures holes D	Ø 0.69 in through holes	Ø 0.69 in through holes counter-sunk 82°	5/8 - 11 inserts
Bar 2			
Ø 0.69 in through holes	T2	not standard	not standard
Ø 0.69 in through holes counter-sunk 82°	C	C2	not standard
5/8 - 11 inserts	I	CI	I2




C	B	1	8	0	0	-	1	2	C	I
---	---	---	---	---	---	---	---	---	---	---

SERIE: CB1800
'Helical' mount from the CB1800 series

MODEL: -12
height: 5,2in
width: 6,8in
weight: 26lbs
loops: serie
standard is 08 loops

INTERFACE: CI
Ø 0.69 in through
holes counter-sunk
82° in bar 1,
5/8 - 11 inserts in
bar 2



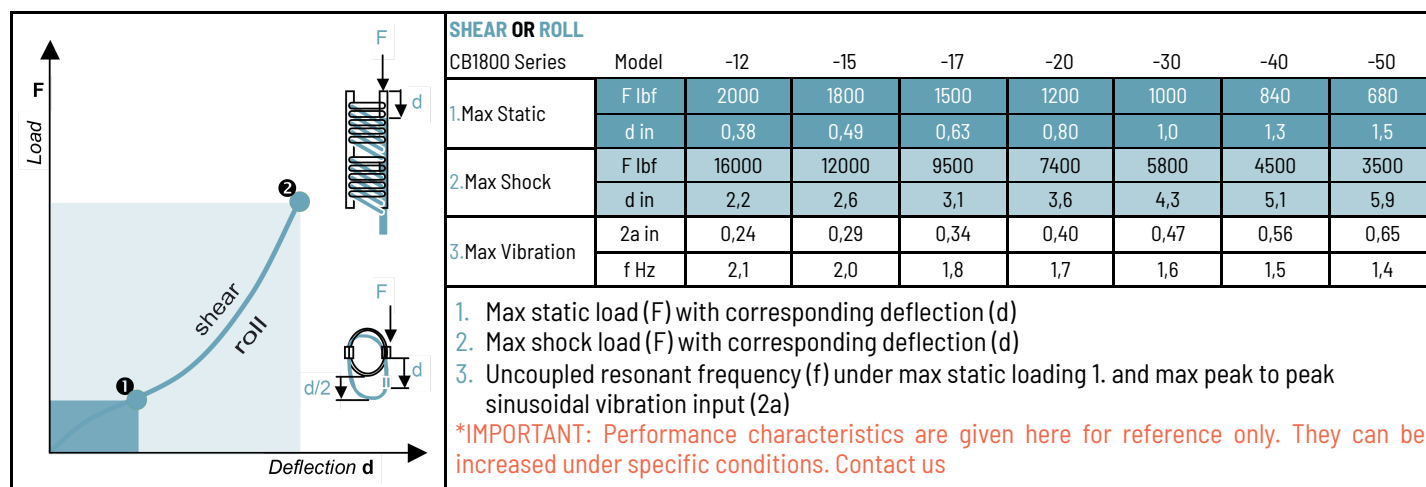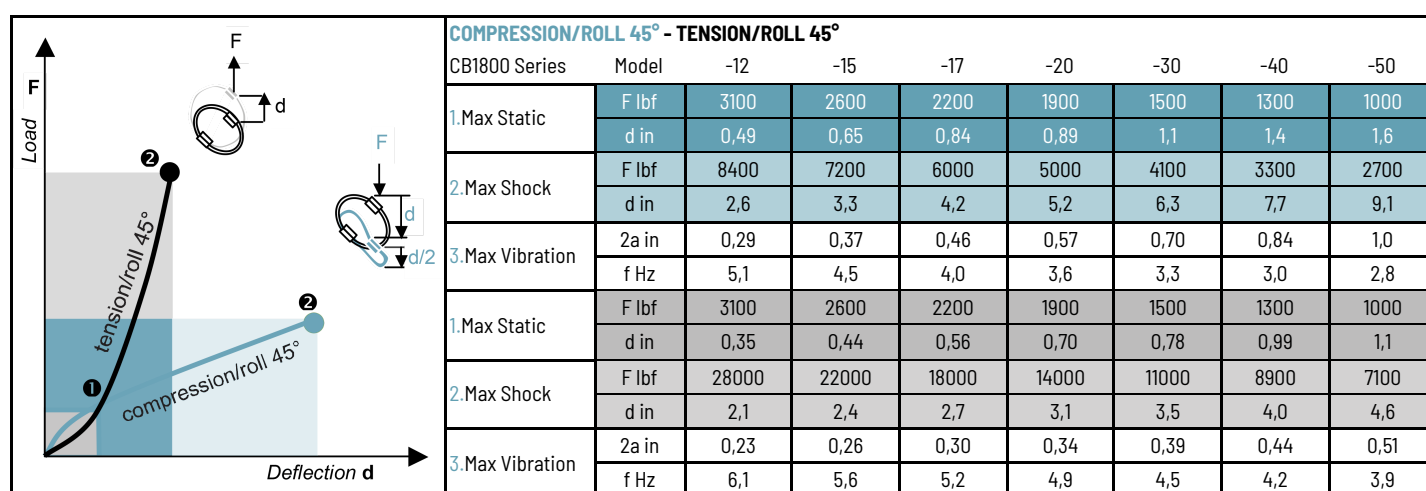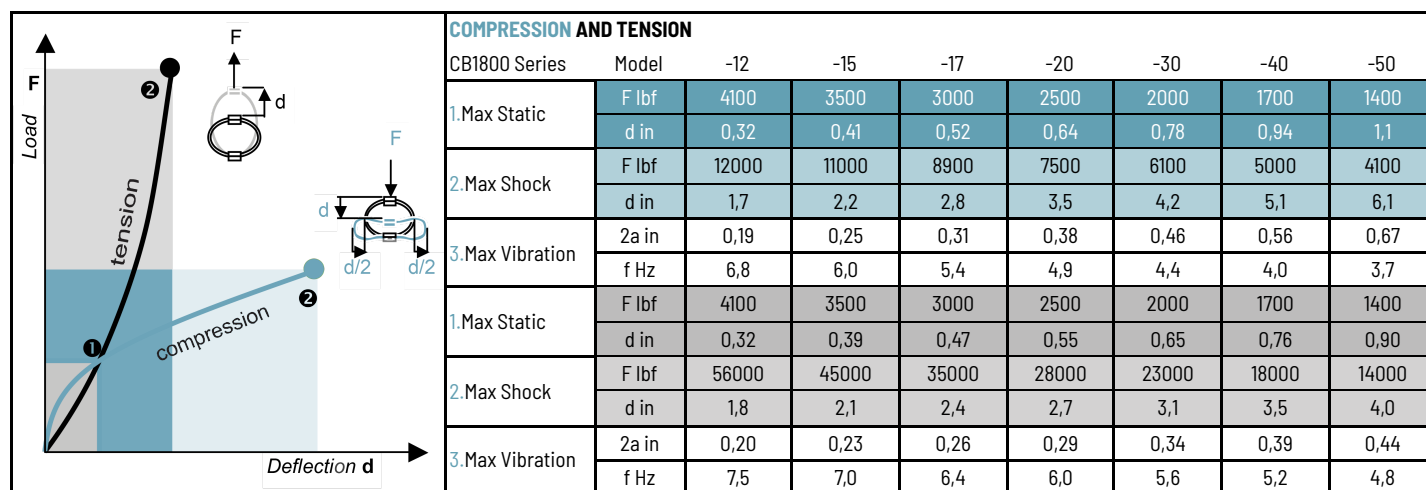

TYPICAL SHOCK/VIBRATION SPECIFICATIONS:

Air	AIR 7306, MIL-E-5400, MIL-C-172, MIL-STD-810
Ground Forces	GAM EG13A, SEFT 001, MIL-STD-810, VG 9533
Marine	GAM EG13C, IT25-21/96-31/15-86, MIL-S-167, MIL-S-901, STANAG 042, BV 043.73, BV 044
Others	GAM EMB1, GAM EMBT4, DEF STAN 07-55, IEC 571, FINABEL 2C

