


WIRE ROPE ISOLATORS: 'HELICAL'

DEFINITION
series CB1900

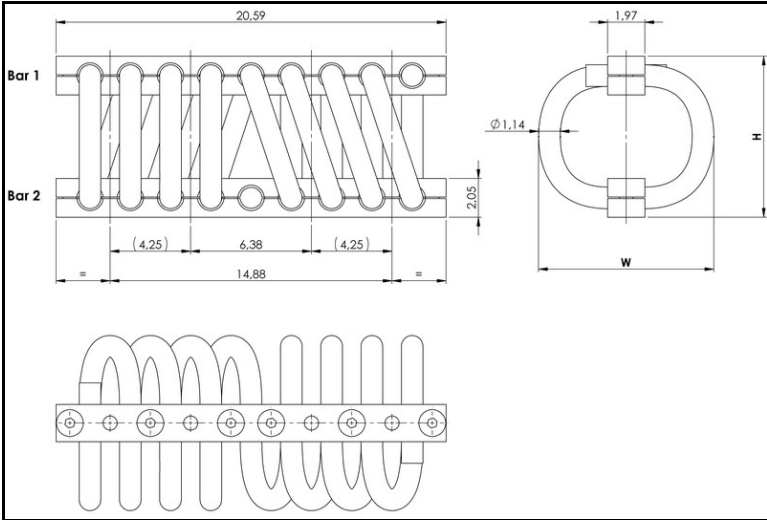

- All metal multidirectional anti-vibration/shock mounts
- Exceptional reliability and long life
- High damping
- No aging
- Corrosion resistant
- Unequalled temperature range : -180°C to +300°C / -290F to 570 F
- Great adaptability/versatility

Specials on request
(material size and number of loops, etc.)

Dimensions are in inches. For reference only

SERIES
Materials and finishes (meets RoHS requirements)
CB1900
Cable: stainless steel galvanized available: CBG
Retainer bars: aluminium alloy/ SurTec
Screws: alloy steel/ zinc plate
Inserts: stainless steel
All stainless steel: CBSS
Other materials on request

MODEL			
	height H (in)	width W (in)	weight (lbs)
-10	7,1	8,5	44
-12	8,5	9,5	50
-15	9,3	10,3	54

INTERFACES			
fixtures holes D	Bar 1		
	ø 0.79 in through holes	ø 0.79 in through holes counter-sunk 82°	3/4 - 10 inserts
Bar 2			
ø 0.79 in through holes	T2	not standard	not standard
ø 0.79 in through holes counter-sunk 82°	C	C2	not standard
3/4 - 10 inserts	I	CI	I2




C	B	1	9	0	0	-	1	0	C	I
---	---	---	---	---	---	---	---	---	---	---

SERIE: CB1900
'Helical' mount from the CB1900 series

MODEL: -10
height: 7,1in
width: 8,5in
weight: 44lbs
loops: serie
standard is 08 loops

INTERFACE: CI
ø 0.79 in through
holes counter-sunk
82° in bar 1,
3/4 - 10 inserts in
bar 2



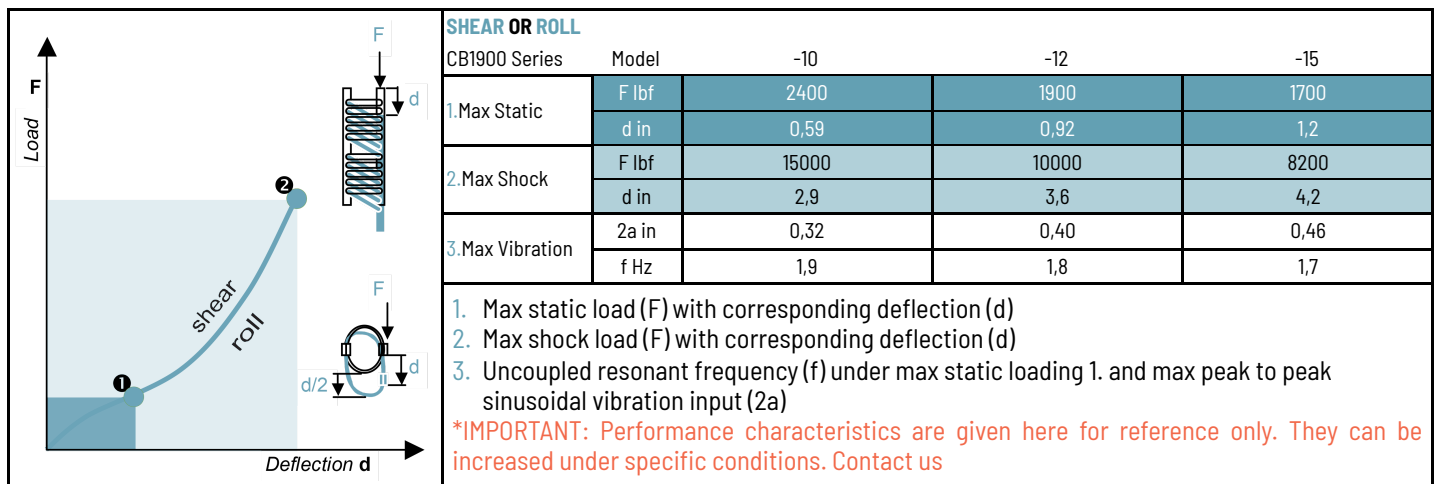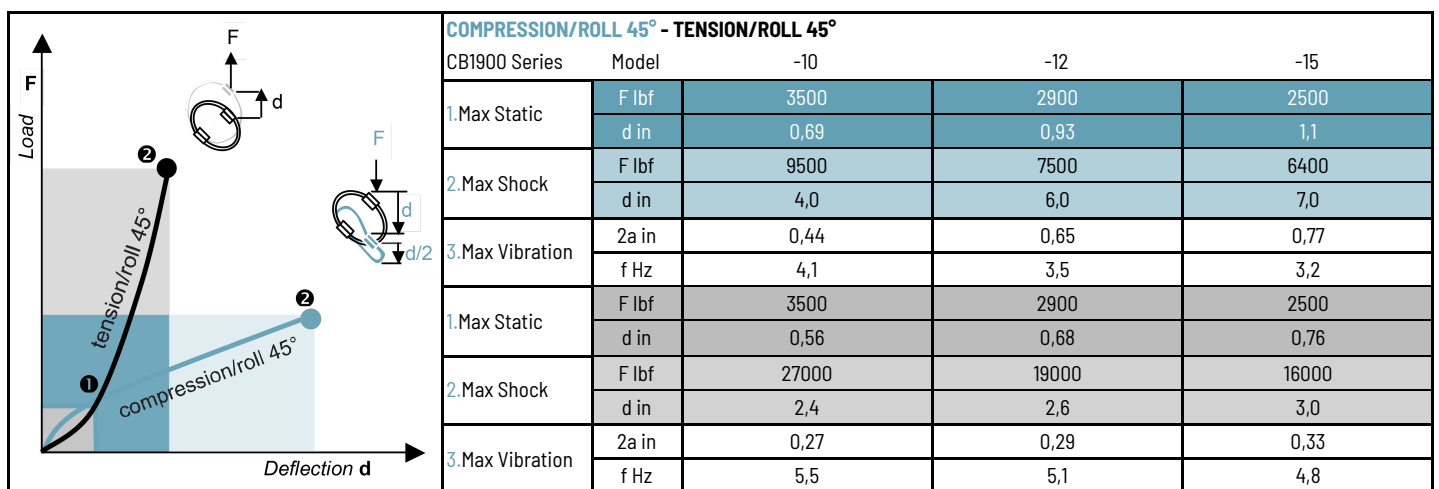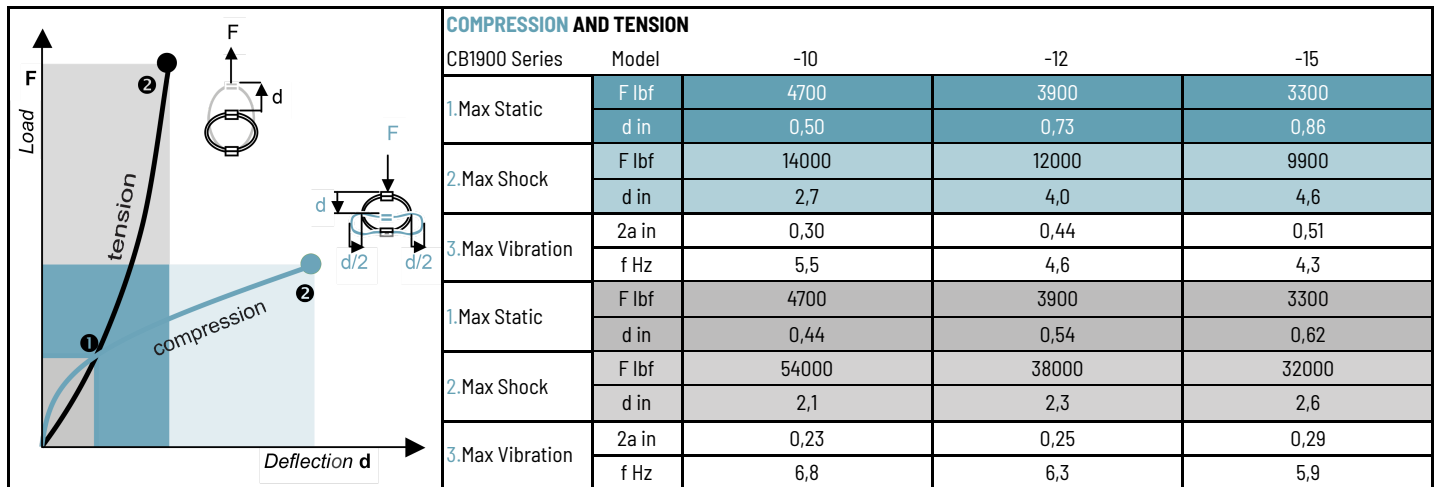

TYPICAL SHOCK/VIBRATION SPECIFICATIONS:

Air	AIR 7306, MIL-E-5400, MIL-C-172, MIL-STD-810
Ground Forces	GAM EG13A, SEFT 001, MIL-STD-810, VG 9533
Marine	GAM EG13C, IT25-21/96-31/15-86, MIL-S-167, MIL-S-901, STANAG 042, BV 043.73, BV 044
Others	GAM EMB1, GAM EMBT4, DEF STAN 07-55, IEC 571, FINABEL 2C