


WIRE ROPE ISOLATORS: 'HELICAL'

DEFINITION
series CB2000

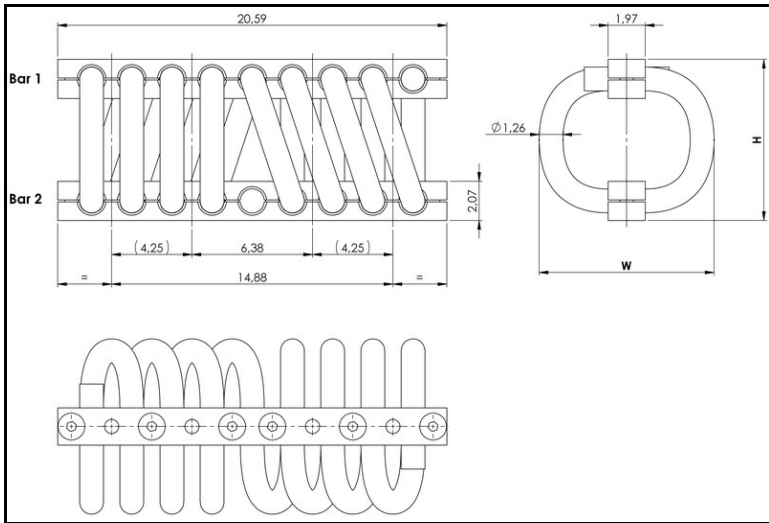

- All metal multidirectional anti-vibration/shock mounts
- Exceptional reliability and long life
- High damping
- No aging
- Corrosion resistant
- Unequalled temperature range : -180°C to +300°C / -290F to 570 F
- Great adaptability/versatility

Specials on request
(material size and number of loops, etc.)

Dimensions are in inches. For reference only

SERIES
Materials and finishes (meets RoHS requirements)
CB2000
Cable: stainless steel galvanized available: CBG
Retainer bars: aluminium alloy/ SurTec
Screws: alloy steel/ zinc plate
Inserts: stainless steel
All stainless steel: CBSS
Other materials on request

MODEL			
	height H (in)	width W (in)	weight (lbs)
-10	7,1	8,3	49
-12	8,5	9,8	58
-15	9,3	10,6	63

INTERFACES			
fixtures holes D	Bar 1		
	ø 0.79 in through holes	ø 0.79 in through holes counter-sunk 82°	3/4 - 10 inserts
Bar 2			
ø 0.79 in through holes	T2	not standard	not standard
ø 0.79 in through holes counter-sunk 82°	C	C2	not standard
3/4 - 10 inserts	I	CI	I2


C	B	2	0	0	0	-	1	0	C	I
---	---	---	---	---	---	---	---	---	---	---

SERIE: CB2000
'Helical' mount from the CB2000 series

MODEL: -10
height: 7,1in
width: 8,3in
weight: 49lbs
loops: serie
standard is 08 loops


INTERFACE: CI
ø 0.79 in through
holes counter-sunk
82° in bar 1,
3/4 - 10 inserts in
bar 2



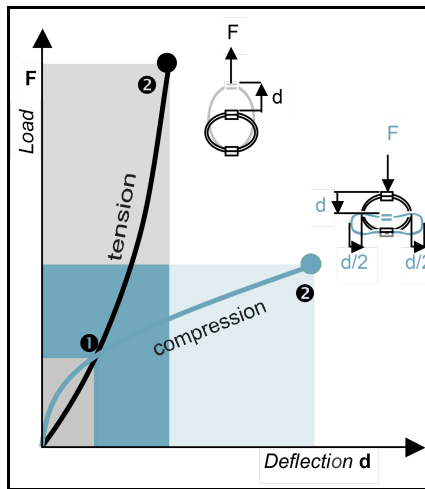


COMPRESSION AND TENSION

CB2000 Series	Model	-10	-12	-15
1.Max Static	F lbf	6800	4800	4100
	d in	0,50	0,73	0,86
2.Max Shock	F lbf	20000	15000	12000
	d in	2,7	4,0	4,6
3.Max Vibration	2a in	0,30	0,44	0,51
	f Hz	5,6	4,6	4,2
1.Max Static	F lbf	6800	4800	4100
	d in	0,40	0,55	0,64
2.Max Shock	F lbf	72000	48000	40000
	d in	1,8	2,4	2,8
3.Max Vibration	2a in	0,20	0,26	0,30
	f Hz	7,2	6,2	5,7

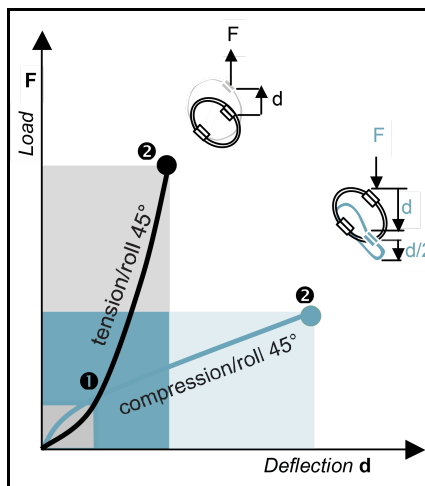

COMPRESSION/ROLL 45° - TENSION/ROLL 45°

CB2000 Series	Model	-10	-12	-15
1.Max Static	F lbf	5100	3600	3000
	d in	0,73	0,91	1,1
2.Max Shock	F lbf	13000	9500	8000
	d in	4,0	6,0	7,0
3.Max Vibration	2a in	0,44	0,65	0,77
	f Hz	4,1	3,5	3,2
1.Max Static	F lbf	5100	3600	3000
	d in	0,51	0,73	0,84
2.Max Shock	F lbf	36000	24000	20000
	d in	2,1	2,7	3,2
3.Max Vibration	2a in	0,23	0,30	0,35
	f Hz	5,8	5,0	4,7

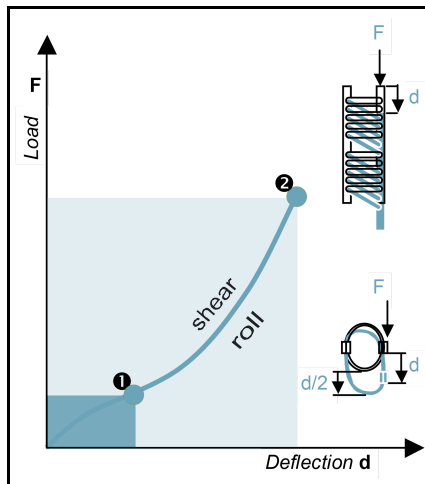

SHEAR OR ROLL

CB2000 Series	Model	-10	-12	-15
1.Max Static	F lbf	3400	2400	2000
	d in	0,58	0,96	1,1
2.Max Shock	F lbf	20000	13000	10000
	d in	2,6	3,7	4,3
3.Max Vibration	2a in	0,29	0,41	0,47
	f Hz	2,0	1,8	1,7

1. Max static load (F) with corresponding deflection (d)
 2. Max shock load (F) with corresponding deflection (d)
 3. Uncoupled resonant frequency (f) under max static loading 1. and max peak to peak sinusoidal vibration input (2a)
- *IMPORTANT:** Performance characteristics are given here for reference only. They can be increased under specific conditions. Contact us

TYPICAL SHOCK/VIBRATION SPECIFICATIONS:

Air	AIR 7306, MIL-E-5400, MIL-C-172, MIL-STD-810
Ground Forces	GAM EG13A, SEFT 001, MIL-STD-810, VG 9533
Marine	GAM EG13C, IT25-21/96-31/15-86, MIL-S-167, MIL-S-901, STANAG 042, BV 043.73, BV 044
Others	GAM EMB1, GAM EMBT4, DEF STAN 07-55, IEC 571, FINABEL 2C