


# WIRE ROPE ISOLATORS: 'HELICAL'

DEFINITION  
**series FH68**

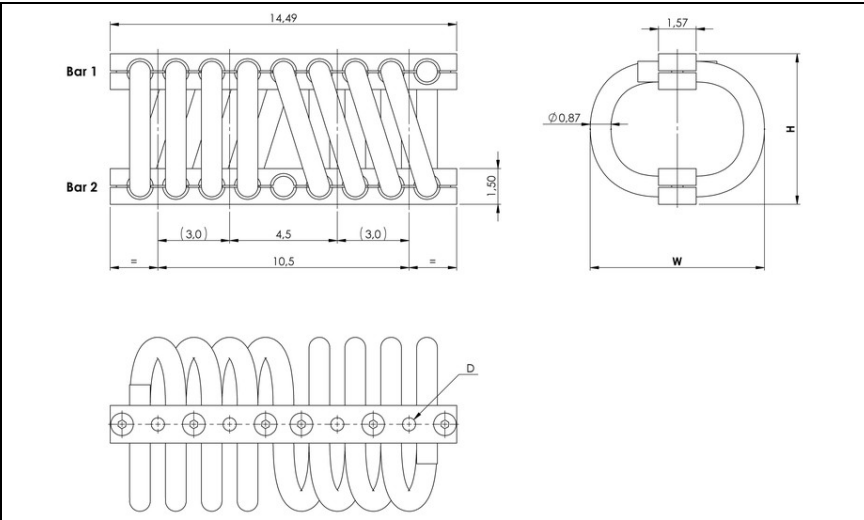

- All metal multidirectional anti-vibration/shock mounts
- Exceptional reliability and long life
- High damping
- No aging
- Corrosion resistant
- Unequalled temperature range : -180°C to +300°C / -290F to 570 F
- Great adaptability/versatility

Specials on request  
(material size and number of loops, etc.)

Dimensions are in inches. For reference only

| SERIES                                                        |
|---------------------------------------------------------------|
| Materials and finishes<br>(meets RoHS requirements)           |
| <b>FH68</b>                                                   |
| <b>Cable:</b><br>stainless steel<br>galvanized available: CBG |
| <b>Retainer bars:</b><br>aluminium alloy/<br>SurTec           |
| <b>Screws:</b><br>alloy steel/ zinc plate                     |
| <b>Inserts:</b><br>stainless steel                            |
| All stainless steel: CBSS                                     |
| Other materials on request                                    |

| MODEL | height<br>H (in) | width<br>W (in) | weight<br>(lbs) |
|-------|------------------|-----------------|-----------------|
| -24   | 5.2              | 5.5             | 17              |
| -28   | 6.0              | 6.5             | 19              |
| -32   | 6.3              | 7.0             | 21              |
| -36   | 7.5              | 8.3             | 24              |
| -44   | 8.5              | 9.3             | 27              |

| INTERFACES                                      |                            |                                                   |                  |
|-------------------------------------------------|----------------------------|---------------------------------------------------|------------------|
| fixtures holes D                                | Bar 1                      |                                                   |                  |
|                                                 | ø 0.53 in<br>through holes | ø 0.53 in<br>through holes<br>counter-sunk<br>82° | 1/2 - 13 inserts |
| Bar 2                                           |                            |                                                   |                  |
| ø 0.53 in through<br>holes                      | T2                         | not standard                                      | not standard     |
| ø 0.53 in through<br>holes counter-<br>sunk 82° | TC                         | C2                                                | not standard     |
| 1/2 - 13 inserts                                | TI                         | CI                                                | I2               |

|   |   |   |   |   |   |   |   |   |   |   |
|---|---|---|---|---|---|---|---|---|---|---|
| F | H | 6 | 8 | - | 2 | 4 | 0 | 8 | C | I |
|---|---|---|---|---|---|---|---|---|---|---|


SERIE: FH68  
'Helical' mount from the  
FH68 series

MODEL: -24  
height: 5.2in  
width: 5.5in  
weight: 17lbs

LOOPS: 08  
Serie  
standard is  
08 loops


INTERFACE: CI  
ø 0.53 in through  
holes counter-sunk  
82° in bar 1,  
1/2 - 13 inserts in  
bar 2



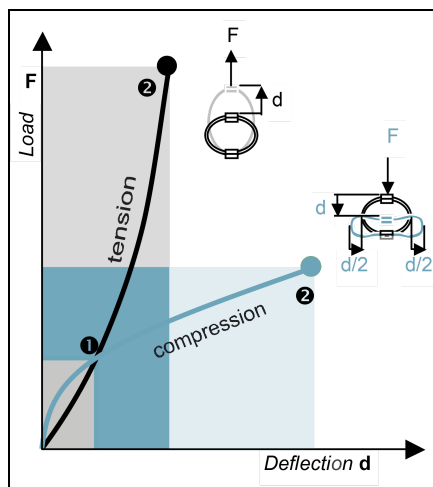


## COMPRESSION AND TENSION

| FH68 Series     | Model | -24   | -28   | -32   | -36   | -44   |
|-----------------|-------|-------|-------|-------|-------|-------|
| 1.Max Static    | F lbf | 3600  | 2600  | 2300  | 1600  | 1300  |
|                 | d in  | 0.33  | 0.47  | 0.54  | 0.73  | 0.88  |
| 2.Max Shock     | F lbf | 11000 | 7800  | 6800  | 4800  | 3800  |
|                 | d in  | 2.0   | 2.7   | 2.9   | 4.0   | 5.0   |
| 3.Max Vibration | 2a in | 0.22  | 0.30  | 0.32  | 0.44  | 0.55  |
|                 | f Hz  | 6.6   | 5.7   | 5.4   | 4.6   | 4.2   |
| 1.Max Static    | F lbf | 3600  | 2600  | 2300  | 1600  | 1300  |
|                 | d in  | 0.22  | 0.32  | 0.38  | 0.50  | 0.60  |
| 2.Max Shock     | F lbf | 31000 | 23000 | 21000 | 15000 | 11000 |
|                 | d in  | 0.83  | 1.3   | 1.5   | 2.0   | 2.4   |
| 3.Max Vibration | 2a in | 0.09  | 0.14  | 0.17  | 0.22  | 0.26  |
|                 | f Hz  | 10.2  | 8.3   | 7.6   | 6.6   | 6.1   |

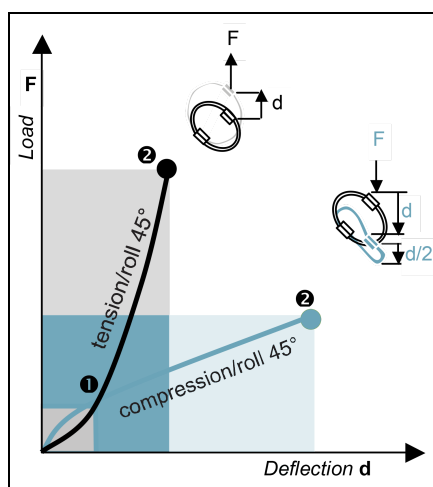

## COMPRESSION/ROLL 45° - TENSION/ROLL 45°

| FH68 Series     | Model | -24   | -28   | -32   | -36  | -44  |
|-----------------|-------|-------|-------|-------|------|------|
| 1.Max Static    | F lbf | 2700  | 2000  | 1700  | 1200 | 960  |
|                 | d in  | 0.44  | 0.55  | 0.71  | 1.00 | 1.0  |
| 2.Max Shock     | F lbf | 6900  | 5000  | 4400  | 3100 | 2500 |
|                 | d in  | 3.0   | 4.0   | 4.4   | 6.1  | 7.4  |
| 3.Max Vibration | 2a in | 0.33  | 0.44  | 0.49  | 0.67 | 0.82 |
|                 | f Hz  | 5.0   | 4.3   | 4.0   | 3.4  | 3.2  |
| 1.Max Static    | F lbf | 2700  | 2000  | 1700  | 1200 | 960  |
|                 | d in  | 0.27  | 0.39  | 0.44  | 0.64 | 0.73 |
| 2.Max Shock     | F lbf | 15000 | 11000 | 10000 | 7300 | 5700 |
|                 | d in  | 0.95  | 1.4   | 1.8   | 2.3  | 2.7  |
| 3.Max Vibration | 2a in | 0.10  | 0.16  | 0.19  | 0.25 | 0.30 |
|                 | f Hz  | 8.2   | 6.7   | 6.1   | 5.4  | 4.9  |

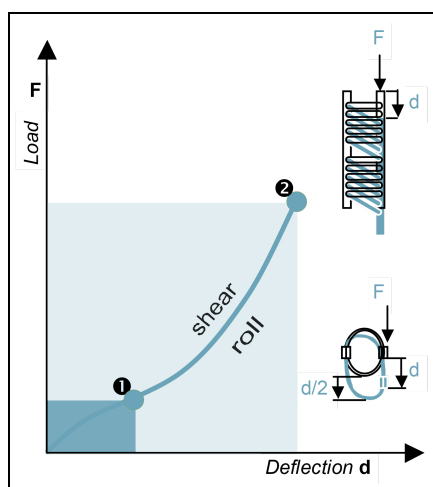

## SHEAR OR ROLL

| FH68 Series     | Model | -24  | -28  | -32  | -36  | -44  |
|-----------------|-------|------|------|------|------|------|
| 1.Max Static    | F lbf | 1800 | 1300 | 1100 | 800  | 640  |
|                 | d in  | 0.46 | 0.66 | 0.71 | 1.0  | 1.3  |
| 2.Max Shock     | F lbf | 8300 | 6100 | 5500 | 3700 | 2800 |
|                 | d in  | 1.6  | 2.2  | 2.6  | 3.5  | 4.2  |
| 3.Max Vibration | 2a in | 0.18 | 0.25 | 0.28 | 0.38 | 0.46 |
|                 | f Hz  | 2.8  | 2.4  | 2.2  | 1.9  | 1.8  |

1. Max static load (F) with corresponding deflection (d)
2. Max shock load (F) with corresponding deflection (d)
3. Uncoupled resonant frequency (f) under max static loading 1. and max peak to peak sinusoidal vibration input (2a)

**\*IMPORTANT:** Performance characteristics are given here for reference only. They can be increased under specific conditions. Contact us

## TYPICAL SHOCK/VIBRATION SPECIFICATIONS:

|               |                                                                                     |
|---------------|-------------------------------------------------------------------------------------|
| Air           | AIR 7306, MIL-E-5400, MIL-C-172, MIL-STD-810                                        |
| Ground Forces | GAM EG13A, SEFT 001, MIL-STD-810, VG 9533                                           |
| Marine        | GAM EG13C, IT25-21/96-31/15-86, MIL-S-167, MIL-S-901, STANAG 042, BV 043.73, BV 044 |
| Others        | GAM EMB1, GAM EMBT4, DEF STAN 07-55, IEC 571, FINABEL 2C                            |