

- All metal multidirectional anti-vibration/shock mounts
- Exceptional reliability and long life
- High damping
- No aging
- Corrosion resistant
- Unequalled temperature range : -180°C to +300°C / -290F to 570 F
- Great adaptability/versatility

Specials on request

(material size and number of loops, etc.)

Dimensions are in millimeters. For reference only

SERIES
Materials and finishes (meets RoHS requirements)
CB1390
Cable: stainless steel galvanized available: CBG
Retainer bars: aluminium alloy/ SurTec
Screws: alloy steel/ zinc plate
Inserts: stainless steel
All stainless steel: CBSS
Other materials on request

MODEL				
	height H (mm)	width W (mm)	weight (kg)	
-12	68	83	1,1	
-15	71	87	1,1	
-20	74	93	1,2	
-30	77	107	1,3	
-35	89	111	1,4	
-40	105	124	1,6	
-50	108	143	1,7	
-60	124	146	1,8	
-70	134	156	1,9	
-80	155	183	2,2	

INTERFACES			
fixtures holes D	Bar 1		
	4 through holes ø8,4mm	4 through holes ø8,4mm counter-sunk 90°	4 inserts M8
Bar 2			
4 through holes ø8,4mm	no suffix	not standard	not standard
4 through holes ø8,4mm counter-sunk 90°	CM	CM2	not standard
4 inserts M8	IM	CIM	IM2

C B 1 3 9 0 - 1 2 C I M

SERIE: CB1390

'Helical' mount from the CB1390 series




MODEL: -12

height: 68mm
width: 83mm
weight: 1,1kg
loops: serie
standard is 08 loops

INTERFACE: CIM

4 through holes ø8,4mm
counter-sunk 90° in bar 1,
4 inserts M8 in bar 2



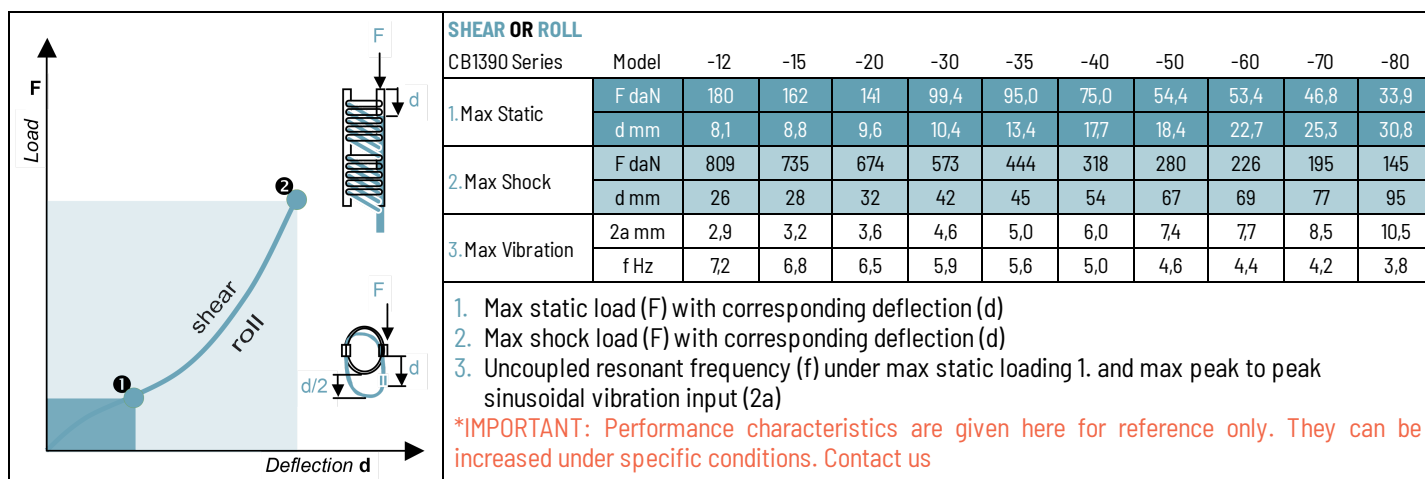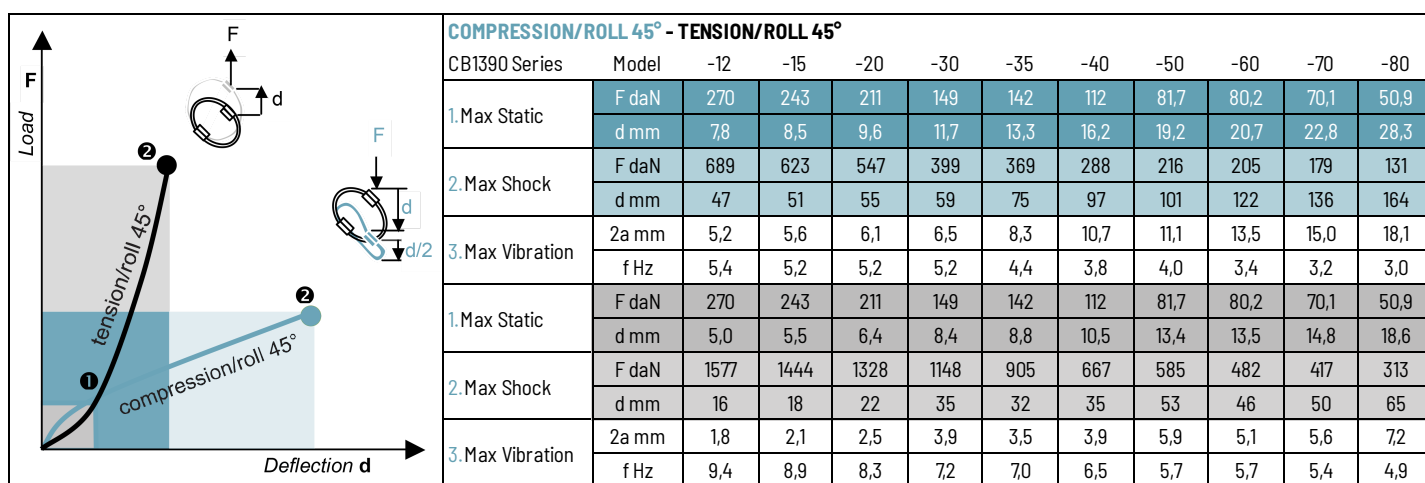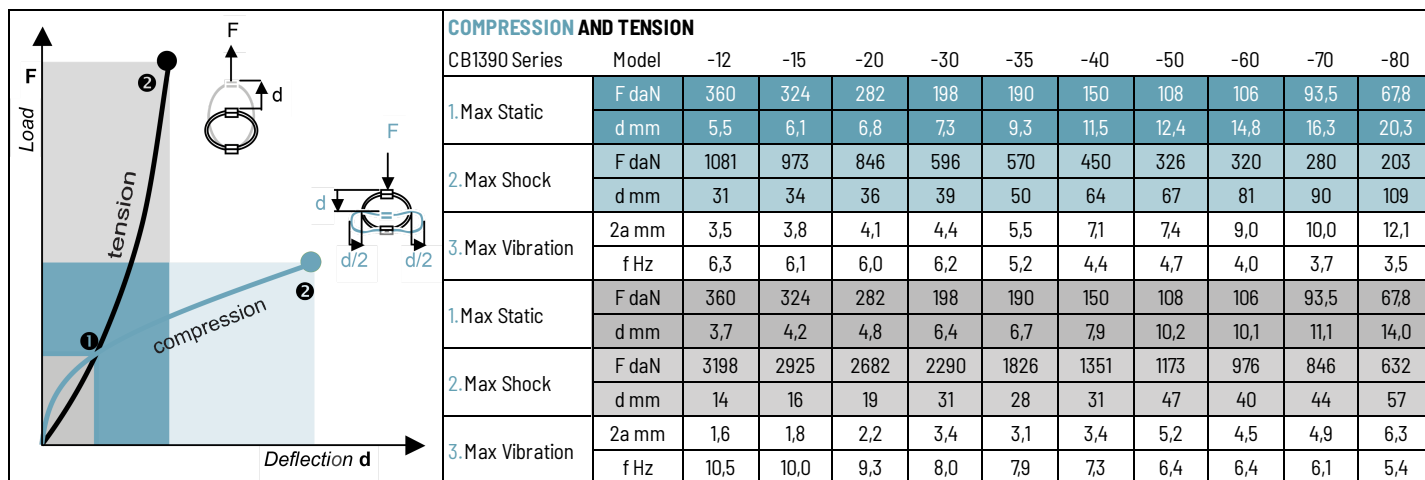

TYPICAL SHOCK/VIBRATION SPECIFICATIONS:

- Air** AIR 7306, MIL-E-5400, MIL-C-172, MIL-STD-810
- Ground Forces** GAM EG13A, SEFT 001, MIL-STD-810, VG 9533
- Marine** GAM EG13C, IT25-21/96-31/15-86, MIL-S-167, MIL-S-901, STANAG 042, BV 043.73, BV 044
- Others** GAM EMB1, GAM EMBT4, DEF STAN 07-55, IEC 571, FINABEL 2C